




INA Rolamentos do Brasil Ltda.

80 mm x 140 mm x 26 mm NTN 6216LLB Rolamentos de esferas profundas

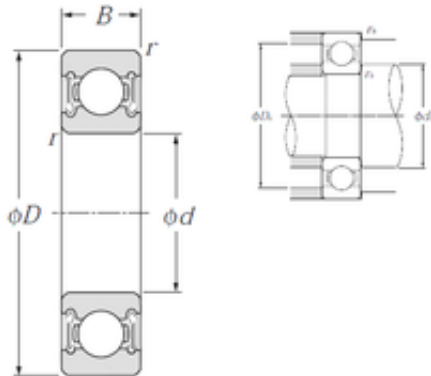

Bearing No. 6216LLB

6216LLB Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|--------------------------|
| Size | 80x140x26 mm |
| Bore Diameter | 80 mm |
| Outer Diameter | 140 mm |
| Width | 26 mm |
| d | 80 mm |
| D | 140 mm |
| B | 26 mm |
| C | 26 mm |
| r min. | 2 mm |
| da min. | 89 mm |
| da max | 95,5 mm |
| Da max. | 131 mm |
| ra max. | 2 mm |
| Weight | 1,4 Kg |
| Basic dynamic load rating (C) | 72,5 kN |
| Basic static load rating (C0) | 53 kN |
| (Grease) Lubrication Speed | 4 500 r/min |
| Category | Single Row Ball Bearings |
| Inventory | 0.0 |
| Manufacturer Name | NTN |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 0 |
| EAN | 4547359005028 |
| Product Group | B00308 |
| Enclosure | 2 Seals |



INA Rolamentos do Brasil Ltda.

| | |
|---------------------------------|--|
| Precision Class | ABEC 1 ISO P0 |
| Maximum Capacity / Filling Slot | No |
| Rolling Element | Ball Bearing |
| Snap Ring | No |
| Internal Special Features | No |
| Cage Material | Steel |
| Enclosure Type | Non-Contact Seal |
| Internal Clearance | C0-Medium |
| Inch - Metric | Metric |
| Long Description | 80MM Bore; 140MM Outside Diameter; 26MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage; |
| Other Features | Deep Groove Non-Friction Nitrile Rubber Seal Shell Alvania Prelubricated |
| Category | Single Row Ball Bearing |
| UNSPSC | 31171504 |
| Harmonized Tariff Code | 8482.10.50.68 |
| Noun | Bearing |
| Keyword String | Ball |
| Manufacturer URL | http://www.ntnamerica.com |
| Weight / LBS | 3.13056 |
| Bore | 3.15 Inch 80 Millimeter |
| Outside Diameter | 5.512 Inch 140 Millimeter |
| Inner Race Width | 0 Inch 0 Millimeter |
| Outer Race Width | 1.024 Inch 26 Millimeter |
| bore diameter: | 80 mm |
| static load capacity: | 53000 N |



INA Rolamentos do Brasil Ltda.

| | |
|------------------------------|----------------------------|
| outside diameter: | 140 mm |
| precision rating: | ISO Class 0 |
| overall width: | 26 mm |
| finish/coating: | Uncoated |
| bore type: | Round |
| bearing material: | High Carbon Chrome Steel |
| closure type: | Double Sealed |
| cage material: | Steel |
| row type & fill slot: | Single Row Non-Fill Slot |
| inner ring width: | 26 mm |
| snap ring included: | Without Snap Ring |
| outer ring width: | 26 mm |
| internal clearance: | CN |
| maximum rpm (grease): | 4500 rpm |
| operating temperature range: | -40 to 120 ° C |
| fillet radius: | 2 mm |
| dynamic load capacity: | 72500 N |
| manufacturer product page: | Click here |